CRYSTAL MOUNTAIN PRODUCT BROCHURE





STORM POU Water Cooler C&C

STORM C&C





Our new Bottom-Load water dispenser – the Storm C&C, dispensing cold & ambient water – is the latest model in the Crystal Mountain's line of coolers. The point of use conversion kit is easily installed by opening the front door and sliding it into the base of the cooler with little effort. The Storm features an easy to remove reservoir system, that takes less than a minute to change. The LED indicator tells you when it needs to be replaced. Servicing has never been easier. With its contemporary design, attractive finish, concealed faucets and easy maintenance, the Storm is sure to dazzle in any environment.

Features

- Matte black finish, with stainless look accents and a sliding front door
- SmartFlo™ Water Cartridge replacing is simple, quick and hygienic
- Ergonomic higher dispense point
- Commercial grade and quality construction
- Large dispensing area for coffee pots and larger water bottles



Concealed Water Outlet

Storm POU assembly





Removable Drip Tray



Unique Sliding Front Door

POU Assembly Bracket

SmartFlo™ Water Cartridge

Simple: In less than 45 seconds all water contact points are exchanged **Quick:** In less than 45 seconds all water contact points are exchanged **Hygienic:** All water contact points are exchanged **100% Sanitization**





Performance and Specifications

General

An air-cooled water dispenser with a compressor-driven refrigeration system and a $SmartFlo^{TM}$ Water Cartridge for easy sanitization

Cooler Cabinet

Standard colour in black. Other colours available for high volume orders

Faucet Type

Covered mechanical style faucet system with replaceable water contact components (via SmartFlo[™] Water Cartridge), and a recessed dispensing point to protect from contamination, are extra durable and add to the stylish presentation

Cold Water Tank Specifications

SmartFlo[™] Water Cartridge casing with 1.6 L (0.35 gal) volume
Cold water cooling capacity of 2.8 L/hr (0.62 gal/hr) based on 21°C (69.8°F) room temperature

Technician-adjustable cold control

Preset at factory to dispense water at temperatures from 4-10 $^{\circ}$ C (39.2-50 $^{\circ}$ F) Adjustable cold control located at back of cabinet

Water Tank:

Volume: 6.3 L (1.67 gal)


Compressor

Hermetically sealed reciprocating compressor 220-240VAC 50Hz

Refrigerant Type: R600a

Refrigerant Charge: 220-240VAC 16g (0.564 oz)

Dimensions & Freight Data

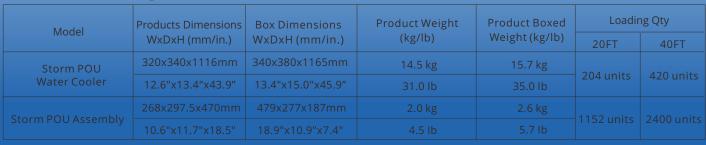





Crystal Mountain Products Limited

European Sales Office

Fence House, Fence Avenue Macclesfield, Cheshire United Kingdom SK10 1LT Tel: +44(0) 1625 439 111 Fax: +44 (0) 1625 502 527 E-mail: cmeurope@crystalcoolers.com

North American Sales Office

200 Carnegie Drive, Suite 234 St. Albert, AB, T8N 5A7 Canada Toll Free: 800 878 6422 Tel: 1 780 454 4545 E-mail: sales@crystalcoolers.com

Crystal Mountain Products Inc.

US Office / Warehouse

1665 Westbelt Drive Columbus, Oh 43228 Outbound Door #2 Tel: (614) 454 1618 Fax:(614) 409 9782 E-mail: sales@crystalcoolers.com

Crystal Mountain International Limited

Hong Kong Sales Office

Room 610, Winfield Commercial Building 6-8a Prat Avenue, Tsimshatsui Kowloon, Hong Kong Tel: (852) 2368 1989 Fax: (852) 3017 6727 E-mail: cmasia@crystalcoolers.com



C € c UL US LISTED CB C SASO ISO 9001 WEEE ROHS

Website: www.crystalcoolers.com

Crystal Mountain has a policy of continuous development and reserves the right to change specifications without notification.

